


BLUE AURA



v
Blackline



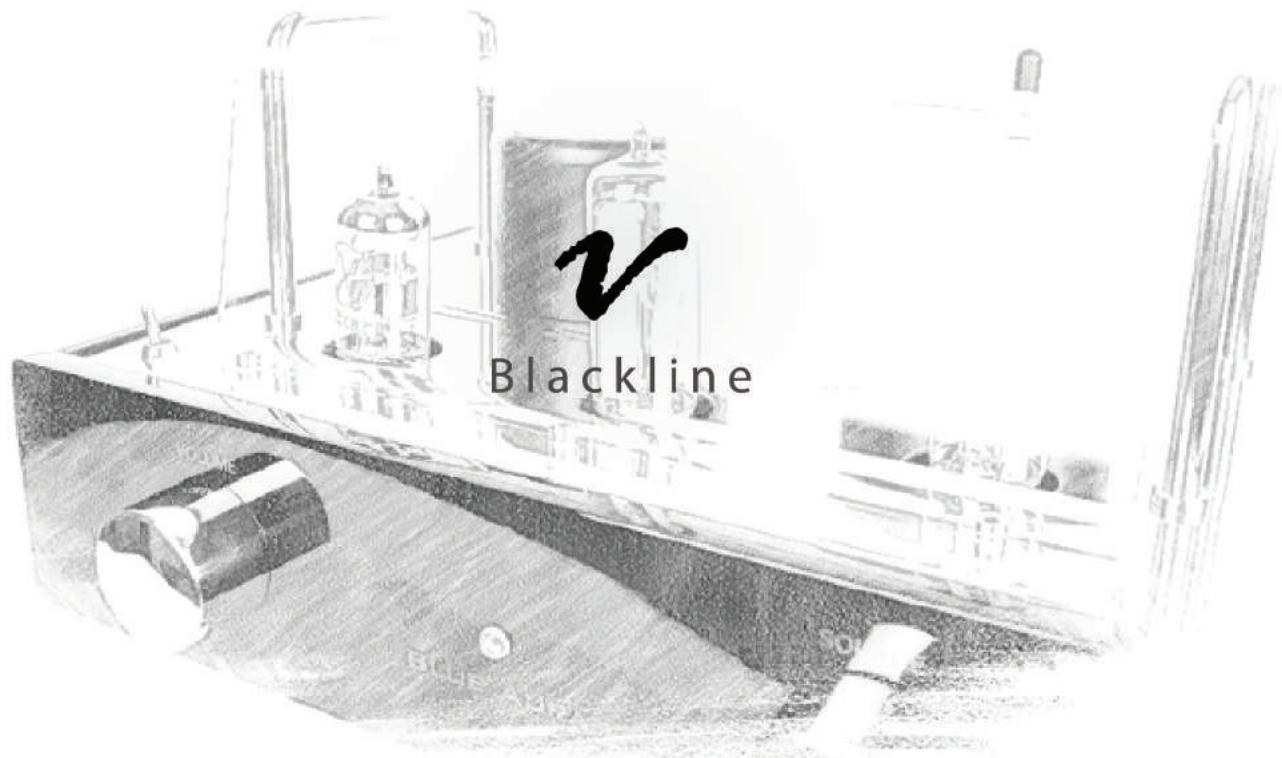

Blackline Ethos

The design ethos of our Blackline range of products is to consider every aspect of the development process focussing on the aesthetics and end-user experience. The presentation of the complete product is as equally important as the build quality and sonic performance.



v 30i

Amplifier

Power Output	20w per channel
Freq. Response.	20Hz – 20 KHz +/- 1.5dB
Harmonic distortion	≤ 0.5%
Signal to noise ratio	≥ 86dB
Input Impedance	47KΩ
Input Sensitivity	1.0V +/- 25%
Output impedance	4Ω / 8 Ω
Vacuum tube Type	6n1 x 2 6e2 x 1
Audio Inputs	RCA/USB mini B/3.5mmi jack
Audio Outputs	Sub out
Power Supply	AC 220-240V/50-60Hz
Short circuit protection	Thermal overload protection
Dimensions	H:140 W:255 D:200mm
Weight	3.5Kg

Loudspeakers

High Frequency Unit	¾" Soft Dome
Low Frequency Unit	3.5" Paper cone Fully Shielded drive units
Frequency Range	55 – 20000Hz
Crossover Frequency	12dB/Octave @3.0KHz
Max RMS Power	30 watts per channel
Dimensions	H:175 W:112 D:145mm
Weight	2.5Kg



v 40

Amplifier

Power Output	30W per channel
Freq. Response.	23Hz – 100 KHz +/- 2dB
Harmonic distortion	30W/0.7% , 1W/0.18%
Signal to noise ratio	88dB 'A'-weighted / 66 dB FLAT
Input Impedance	50K Ω
Input Sensitivity	580mV +/- 5% @30W
Output impedance	4 / 8 Ω
Vacuum tube Type	12AU7 x 2 6e2 x 1
Audio Inputs	BLUETOOTH/RCA/Micro USB/3.5mm mini jack
Audio Outputs	Sub out (20Hz~850Hz)
Power Supply	AC 230V/50Hz AC 115V/60Hz
Weight	3.5Kg
Dimensions	H:148 W:264 D:215mm





ps 40

Loudspeakers

Loudspeakers	High Frequency Unit	1" Soft Dome
	Low Frequency Unit	4" Aluminium Cone
	Frequency Range	45 – 20000Hz
	Crossover Frequency	12dB/Octave @3.0KHz
	Efficiency	83.5dB@2.83V
	Max RMS Power	50 watts per channel
	Weight	3.5Kg each
	Dimensions	H:245 W:145 D:205mm
	Colour Options	Piano Black / Piano White





VOLUME

BLUE AURA

SOURCE

BTB/USB

LINE

AUX

PHONO

v 32

Amplifier

Power Output	20w per channel
Freq. Response.	20Hz–20KHz +/- 1.5dB
Harmonic distortion	5W/0.1%
Signal to noise ratio	>86dB
Input Impedance	47K Ω
Input Sensitivity	1.0V +/- 25%
Output impedance	4 / 8 Ω
Vacuum tube Type	6n1x2 6e2x1
Audio Inputs	Phono/RCA/USB Micro/3.5mm mini jack / Bluetooth 4.0 (aptX)
Audio Outputs	Sub Out and Headphone out (32-64 Ω)
Power Supply	AC 220-240V/50-60Hz
Weight	3.5Kg
Dimensions	H:140 W:255 D:200mm

 Bluetooth®





BLUE AURA

BLUE AURA

ps 30

Loudspeakers

High Frequency Unit	¾" Soft Dome
Low Frequency Unit	3.5" Paper Cone
Frequency Range	55 – 20000Hz
Crossover Frequency	12dB/Octave @3.0KHz Max RMS Power 30 watts per channel
Dimensions	H: 175mm W: 110mm D: 150mm
Weight	2.5Kg





Blackline - enhance your audio experience



r30i



r40



ps40



r32

E & OE



BLUE AURA

www.blueaura.co.uk

Telephone +44 (0) 1480 477738

Email info@blueaura.co.uk